

# AN ANALYSIS OF HARD CLASSIFICATION AND SOFT CLASSIFICATION APPROACHES IN REMOTE SENSING DATA

Ranjhana Sharma<sup>1</sup>, Abeer Masroor<sup>2</sup>, Vandana khanna<sup>3</sup>

<sup>1</sup>Assistant Professor, FOECS, TMU, Moradabad

<sup>2</sup>BCA 4<sup>th</sup> sem, FOECS, TMU, Moradabad

<sup>3</sup>BCA 4<sup>th</sup> sem, FOECS, TMU, Moradabad

[sharmaranjana04@gmail.com](mailto:sharmaranjana04@gmail.com)

[07abeerkhan@gmail.com](mailto:07abeerkhan@gmail.com)

[Vandnakhanna1010@gmail.com](mailto:Vandnakhanna1010@gmail.com)

**Abstract**---In the process of designing real world applications, Hard classification and Soft classification approaches are now becoming prominent techniques. The information regarding thematic maps can be easily extracted with the reinforcement of appropriate algorithm for image classification. Pure and mixed pixels constitute remote sensing images. In digital image analysis, a pixel is generally considered as a unit association to a single land cover class. Nonetheless, due to limited resolution, pixels often represent ground areas which comprises of two or more different land cover classes. Because of this reason, it has been recommended that fuzziness should be domicile in the classification procedure so that pixels may have multiple or partial class membership. In this scenario, a measure of the strength of membership for each class is output by the classifier, resulting in a soft classification technique. This paper bull's eye on hard and soft classification approaches in Remote Sensing Data.

**Keywords**—Remote Sensing, Hard classification approaches, Soft classification approaches, bull's eye, fuzzy means.

## INTRODUCTION


Remote sensing fraternity has used digital image classification for many applications, such as resource utilization, environmental impact analysis and other socio-economic applications. Remote Sensing(RS) can be defined as the science of classification of earth layer characteristics and inference of their graphical and physical properties using electromagnetic mission as a standard of communication. Classification of remotely sensed data into the thematic maps remains a challenge due to many factors, such as, selection of sensed data, features types present, image processing and classification approaches. The term classification is defined by Chambers Twentieth Century Dictionary

as the “act of forming into a class as per a rank or order of person or things”.

In Remote Sensing, basically two Classification methods are used-

### 1. Soft Classification-

Soft classification provides more information and potentially more accurate result, especially for coarse spatial resolution.

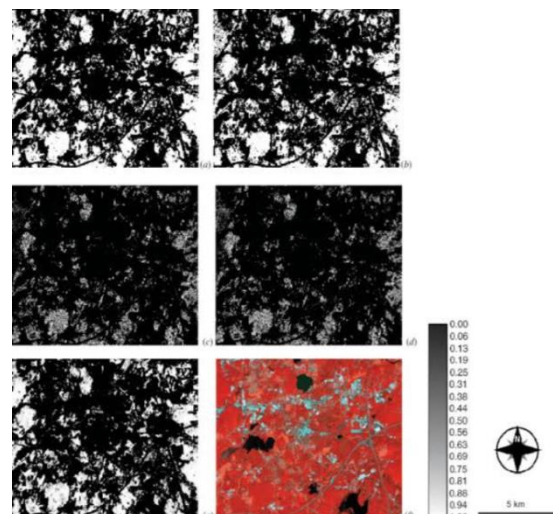

Fig(1) Soft Classification mapping

### 2. Hard Classification-

It make a definitive decision about the land cover class that each pixel is allocated to a single class



Fig (2) Hard classification mapping

### 3- General Review-

In hard classification, class is assigned to pixel is crisp i.e. pixel belongs to one of the class from all classes. The classified pixel is either completely belongs to a class or not [4]. This is called hard classification (Ghosh, 2013). Although in real world the pixel has some spatial resolution and can cover a mixture of two or more class features on ground. The pure pixels are rare. Most likely, boundaries of classes have the mix pixel. Therefore the soft classification approach was developed [5][4]. Soft classification is used to produce class proportions within a pixel in order to increase the classification accuracy [2][4] and to produce meaningful and appropriate land cover composition [8][28]. One of the most popular fuzzy clustering [15] methods are the fuzzy c- means (FCM) [5] which is an unsupervised classifier that in an iterative process assigns class membership values to pixels of an image by minimizing an objective function. Although, a few studies on the use of FCM have been reported, the major limitations of FCM are the probabilistic sum to one constraint. Therefore, besides using this classifier, another fuzzy set clustering method, namely possibilistic c- means (PCM) (Krishnaparam and Keller, 1993,1996), which relaxes this constraint so as to be robust to the noise (i.e. Pixels with a high degree of class mixtures) present in the dataset, has also been implemented[4]. Remote sensing images contain a mixture of pure and mixed pixels. In digital image


classification, a pixel is frequently considered as a unit belonging to a single land cover class.

### Types of Classification Techniques with their classifiers-

1 Hard classification Approaches- Recent advances in supervised image classification have shown that conventional „hard“ classification techniques, which allocate each pixel to a specific class, are often inappropriate for applications where mixed pixels are abundant in the image (Foody et al. 1996). . The conventional hard classification methods, which assume that the pixels are pure, force the mixed pixels to be allocated to one and only one class. This may result into a loss of pertinent information present in a pixel. Mixed pixels may thus be treated as error, noise or uncertainty in class allocation for hard classification methods. The conventional use of hard classification methods that allocate one class to a pixel may tend to over- and under estimate the actual aerial extends of the classes on ground and thus may provide erroneous results (Foody, 2002). Different statistical algorithms in past have been used for allocating mixed pixels.

Hard Classification techniques can be further classified into two main types :-

1. Maximum Like Hood Classifier-
  2. K-Mean Classifier
  3. Minimum Distance-to-mean Classifier
- Mixed pixels are assigned to the class with the highest proportion of coverage to yield a hard classification. Due to which a considerable amount of information is lost (11).To overcome this loss, soft classification was introduced.

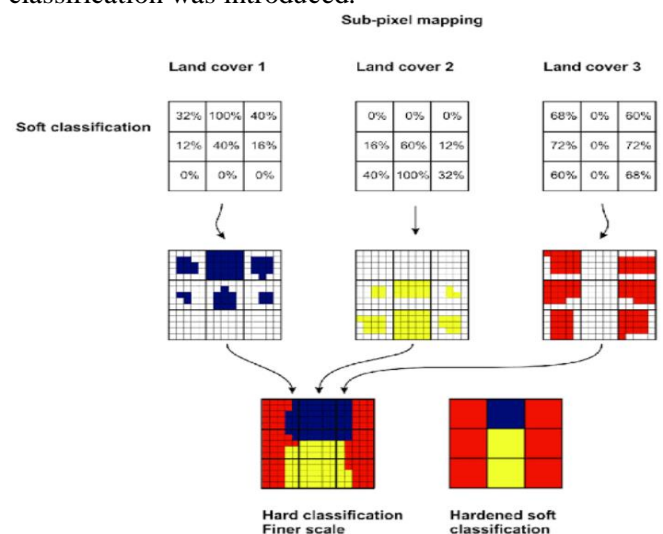


Fig(3)-pixel diagram of hard classification approaches

**Hard classifiers-**

Hard classifiers make a definitive decision about the land cover class that each pixel is allocated to a single class. maximum likelihood, minimum distance, artificial neural network, decision tree, and support vector machine are basically hard classifiers. Basically hard classification techniques are of two types-

1. Linear mixture modeling
2. Fuzzy classification

**Hard vs. Fuzzy Classification**

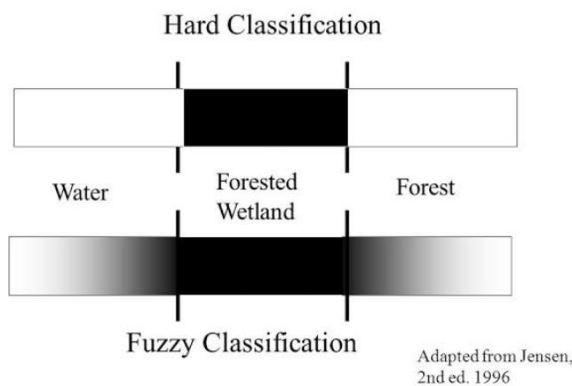

**II.SOFTCLASSIFICATION APPROACHES**

The extraction of land cover from remote sensing Images [22],[23]has traditionally been viewed as a classification problem where each pixel in the image is allocated to one of the possible classes. So remotely sensed data of the earth may be analysed sensing has thus be come an important data source for providing effective land use land cover information particular at regional to global scales. Digital image classification is usually performed to retrieve this information using arrange of statistical pattern recognition or classification technique (supervised and unsupervised) such as maximum like hood classifier, k- mean classifier, the minimum. Distance to mean classifier etc. There classifiers allocate each pixel of the remote sensing image to a single land use land cover class.

**Artificial Neural Network:**

Until recently, supervised classification of space-borne remotely sensed data has been achieved traditionally with Maximum Likelihood(ML)approach.

2) FCM Fuzzy c- Mean(PCM) Clustering FCM- is FCM is a method of clustering which allows one piece data to be long to two or more clusters that may be employed to partition pixels of remote sensing images into different class membership values [1][40].The objective function FCM is

$$J_m(U, V) = \sum_{i=1}^N \sum_{j=1}^C (\mu_{ij})^m \|x_i - v_j\|_A^2$$

[9][10]

(1)

Subject to constraints

Where  $x_i$  is the vector denoting spectral response I (i.e. a vector of spectral response of a pixel),  $V$  is the collection of vector of cluster centers, and  $v_j, \mu_{ij}$  are class membership values of a pixel(members of fuzzy c-partition matrix),  $c$  and  $n$  are number of cluster and pixels respectively,  $m$  is a weighting exponent ( $1 < m < \infty$ ),  $\|x_i - v_j\|_A^2$  is the squared distance ( $d_{ij}$ ) between  $x_i$  and  $v_j$ , and is given by,

$$d_{ij}^2 = \|x_i - v_j\|_A^2 = (x_i - v_j)^T A (x_i - v_j)$$

[9][3] (3)

**3) Possibilities C-Mean(PCM) Clustering-**

The formulation of PCM is based on a modified FCM objective function, whereby an additional term called is regularizing also included. PCM is also an iterative process where the class membership values are obtained by minimizing the generalized least- square error objective function [5][40], given by,



$$\sum_{i=1}^N \mu_{ij} > 0 \text{ for all } j$$

$$0 \leq \mu_{ij} \leq 1 \text{ For all } i,j \quad [7][9]$$

where  $\eta_j$  is the suitable positive number..

and,  $\eta_j$  depends on the shape and the average size of the cluster  $j$  and its value may be computed as;

$$\eta_j = K \frac{\sum_{i=1}^N \mu_{ij}^m d_{ij}^2}{\sum_{i=1}^N \mu_{ij}^m} \quad [7][9]$$

Where  $K$  is a constant and is generally kept as 1. The class memberships,  $\mu_{ij}$  are

$$\mu_{ij} = \frac{1}{1 + \left(\frac{d_{ij}^2}{\eta_j}\right)^{\frac{1}{m-1}}}$$

$$\mu_{ij} = \frac{1}{1 + \left(\frac{d_{ij}^2}{\eta_j}\right)^{\frac{1}{m-1}}} \quad [5][13]$$



#### IV. DISCUSSION AND CONCLUSION

The expected outcomes from this research work would be as follows:

In this paper is focused on soft classification approaches and uncertainty problem for classification and introduce a new entropy(without reference) based criterion.

#### REFERENCE

- [1] Yannis, S. A., and Stefanos, D. K.: Fuzzy Image Classification Using Multi-resolution Neural with Applications to Remote Sensing. In: Electrical Engineering Department, National Technical University of Athens, Zographou 15773, Greece, (1999).
- [2] LARK R. M., and BOLAM H. C. Uncertainty in Prediction of Spatially Variable Data on Soils, Geoderma, vol.77, pp.263- 282,(1997).
- [3] Ranjana Sharma , and R.K Dwivedi A Review of Soft Classification Approaches on Satellite Image & Accuracy Assessment In Proceeding of Fifth International Conference on Soft Computing for Problem Solving. Vol 437 of the series Advances in intelligent System and Computing pp 629-639,(2015)

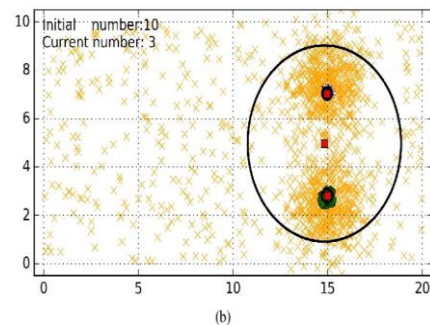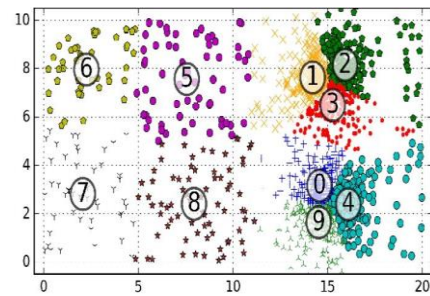

[4] ADAMS, J.B., SMITH, M.O. and GILLESPIE, A.R.: Imaging Spectroscopy: Interpretation based On Spectral Mixture Analysis. In: C.M. Pieters and P..A.J. Englert (Eds), Remote Geochemical Analysis: Elemental and mineralogical composition, pp. 145–166 (1993)

[5] Kumar, A., Ghosh, S. K., and Dadhwal V. K.: A Comparison of The Performance of Fuzzy Algorithm Versus Statistical Algorithm Based Sub-Pixel Classifier for Remote Sensing Data. In: Proceedings of mid-term symposium ISPRS,ITC-The Netherlands. ,(2006)

[6] Bezdek, J. C.: Pattern Recognition with Fuzzy Objective Function Algorithms. In: Plenum, New York, USA, (1981)

[7] Mertens K. C., Verbeke L. P. C., Ducheyne E. I. and Wulf R. R. De.: Using Genetic Algorithms in Sub-Pixel Mapping, In: International Journal Remote Sensing, Vol. 24,no. 21,pp.4241–4247,( 2003)

[8] Shalan, M. A., Arora M. K,Ghosh S. K.: An Evaluation of Fuzzy Classification from IRS IC LISS III Data. In: International Journal of Remote Sensing In: vol. 23,pp. 3179-3186,(2003)

[9] PAL, M. and MATHER, P.M.: An Assessment Of The Effectiveness Of Decision Tree Methods For Land Cover Classification.

In: Remote Sensing of Environment, vol.86, pp.554–565,( 2003)

[10] A Review of Soft Classification Approaches on Satellite Image and Accuracy

Assessment [https://link.springer.com/chapter/10.1007/98-981-10-0451-3\\_56](https://link.springer.com/chapter/10.1007/98-981-10-0451-3_56)

[11]Alpine P., Atkinson P. M.: Sub-Pixel Land Cover Mapping For Per-Field Classification. In: International Journal Remote Sensing